

GROUND SUPPORT TOWER SYSTEMS

GS TOWER FEATURES

Modular Design For Fast Assembly
 Easy Transport
 Adjustable Leveling Pads
 Lowers To 6" For Easy Loading
 Tower Truss Sections Available In 12", 16" or 20.5"

4 Outriggers (Included) Are Required For Each Tower
Outdoor Use Requires Guy Wires

GS TOWER SPECIFICATIONS

- Parts Breakdown:
- 5' Hinged Base Section
 - Head Block
 - Sleeve Block
 - Made from 10' Tower Sections (See Packages)
 - 4 Legs/Outriggers
 - 4 Leg/Outrigger Braces

GS TOWER ACCESSORIES


- Sleeve Blocks Available For:
- Box Truss
 - Triangle Truss
 - Single and Double Hung Club Truss
- Motors Available

GS TOWER WEIGHT LOADING INFO


Max Weight Rating: 12" Tower - 2000 lbs. At Any Height
 Max Weight Rating: 16" Tower - 3000 lbs. At Any Height
 Max Weight Rating: 20.5" Tower - 4000 lbs. At Any Height

GS TOWER PACKAGES


- GS-25 12" Tower
 GS-35 12" / 16" Tower
 40' Maximum Height on 12in HD Truss Towers
 GS-45 20.5" Towers
 Call for custom packages...

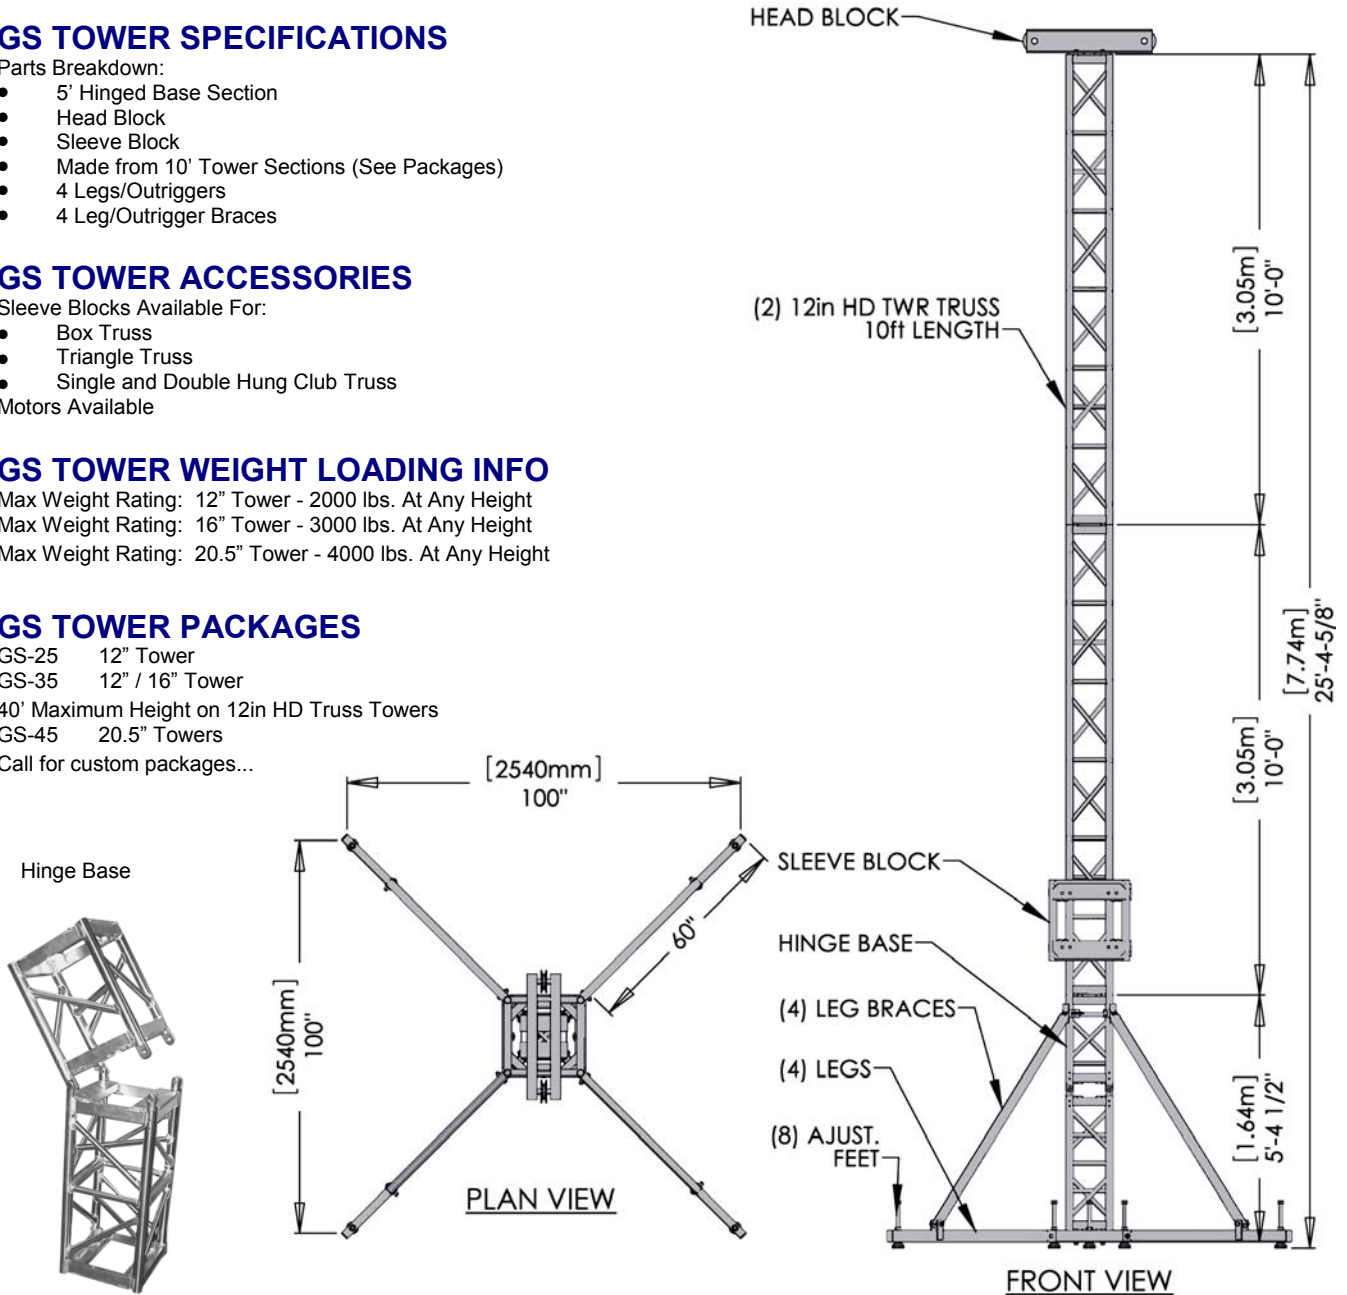

Tower Section

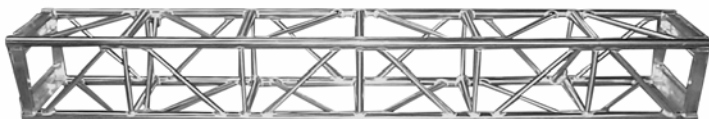

Head Block



Sleeve Block

