



The LA12-25, LA16-30 or LA16-35 provide style, function and value for flying a variety of line array speaker systems. The optional subwoofer platform completes the tower package. The perfect solutions for a corporate meeting or an outdoor festival, these towers are a great addition to any production inventory.

FEATURES

- Modular Design For Fast Assembly
- Easy Transport
- 6061-T6 Aluminum Construction
- Adjustable Leveling Pads
- Tower Hinged For Easy Loading
- Integrated Motor Pick Point
- Works With Many Popular Array Designs
- Steel Spigoted Models Available
- Certified By Structural Engineer

LA12-25 SPECIFICATIONS


- Maximum Height: 25'
- Weight Rating: 1500 lbs.
- Weight: 660 lbs.
- Wind Rating: 50mph

LA16-30 SPECIFICATIONS

- Maximum Height: 30'
- Available with Spigoted or Bolted Truss
- Weight Rating: 2200 lbs.
- Weight: 865 lbs.
- Wind Rating: 45mph

LA16-35 SPECIFICATIONS

- Maximum Height: 35'
- Available with Spigoted or Bolted Truss
- Weight Rating: 2200 lbs.
- Weight: 950 lbs.
- Wind Rating: 45mph

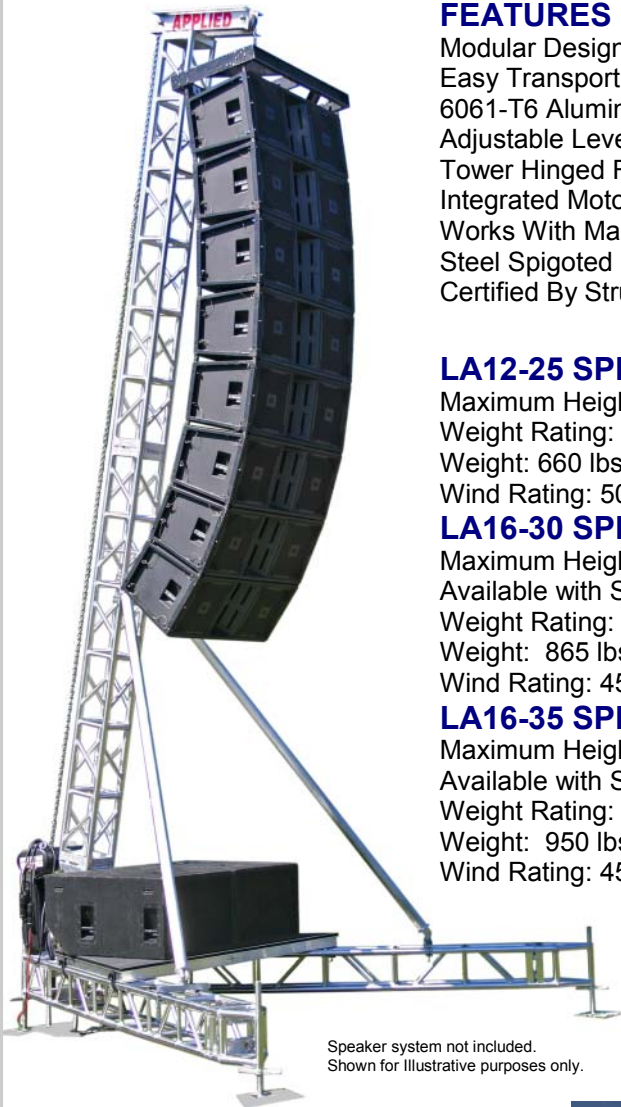


Speaker system not included.
Shown for illustrative purposes only.

Tower Item No.: 1-25-200
Sub Deck Item No.: 1-25-201



Brace Support

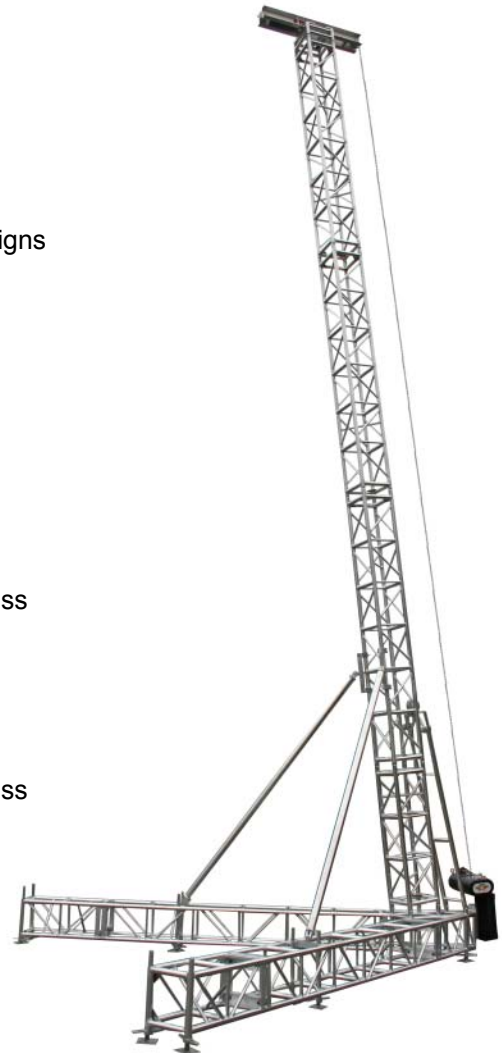

Tower Item No.: 1-35-216S



Motor Mount