





Applied Electronics GS Towers are constructed from heavy duty, schedule 80, 6061-T6 aluminum tube and are available in 12", 16" or 20.5" tower truss. These towers provide the support structure for roof systems, video walls, sound reinforcement and lighting grids where heavier load ratings are required. They can be supplied with sleeve blocks and accessories for most rigging applications.

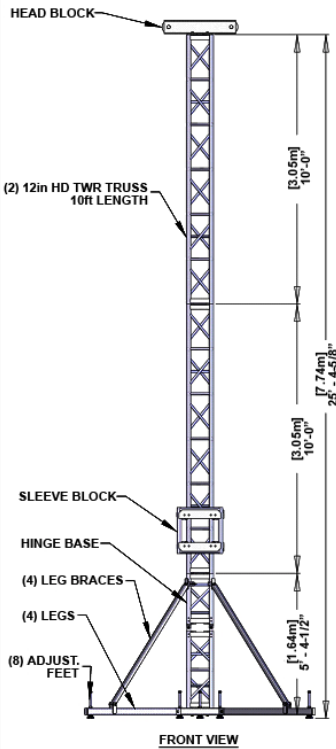

FRONT VIEW



PLAN VIEW

## FEATURES

- Modular Design For Fast Assembly And Easy Transport
- Adjustable Leveling Pads
- Lowers To 6" For Easy Loading
- Three Way Custom Sleeve Blocks
- Tower Truss Sections Available In 12", 16" or 20.5"
- Highly Polished Aluminum Tubing
- 1.9" OD 6061-T6 Aluminum Tube Schd #80
- 0.200" Wall Thickness
- 1.05" OD Aluminum Bracing

## ORDERING INFORMATION

- Item No. 1-25-012 (25' Height With 12" Tower Truss)
- GS-25, 12" Tower Truss: Maximum Weight Rating - 2000 lbs. at 25'
- Item No. 1-35-012 (35' Maximum Height With 12" Tower Truss)
- GS-35 12" Tower Truss: Maximum Weight Rating - 2000 lbs. at 35'
- Item No. 1-45-016 (45' Maximum Height With 16" Tower Truss)
- GS-45 16" Tower Truss: Maximum Weight Rating - 3000 lbs. at 45'
- Item No. 1-55-205 (55' Maximum Height With 20.5" Tower Truss)
- GS-55 20.5" Tower Truss: Maximum Weight Rating - 4000 lbs. at 55'

## COMPONENTS

- 5' Hinged Base Section
- Head Block
- Sleeve Block
- 10' Tower Truss Sections
- 4 Outriggers
- Guy Wires (Required For Outdoor Use)

## OPTIONS

- CM Hoists
- Complete Motor Control Packages
- Tower Lifting Arm
- Guy Wire Packages
- Custom Length Tower Sections



Item No. 10-12-120



## GUY WIRE PACKAGE ORDERING INFORMATION

Item No.	Tower Height One Pkg Per Tower	Weight
14-25-000	25' Towers	100 lbs.
14-35-000	35' Towers	110 lbs.
14-45-000	45' Towers	140 lbs.
14-55-000	55' Towers	160 lbs.

## TOWER TRUSS ORDERING INFORMATION

Item No.	Dimensions	Weight
10-12-120	12" x 12" x 10'	82 lbs.
10-12-096	12" x 12" x 8'	48 lbs.
10-12-060	12" x 12" x 5'	35 lbs.
10-16-120	16" x 16" x 10'	96 lbs.
10-16-096	16" x 16" x 8'	76 lbs.
10-16-060	16" x 16" x 5'	28 lbs.
10-20-120	20.5" x 20.5" x 10'	95 lbs.
10-20-096	20.5" x 20.5" x 8'	85 lbs.
10-20-060	20.5" x 20.5" x 5'	75 lbs.